



## Hot water generation VRV IV Heat pump systems

### HXY-A

#### Highly efficient space heating and cooling

Producing hot water from a heat pump system provides extremely low cost heating and cooling of water. Temperatures between 5°C to 45°C can be achieved allowing water temperature control for multiple applications without the need for a separate system.

#### Features and benefits:

- > Highly efficient space heating/cooling
- > Air to water connection to VRV for applications such as underfloor, AHU, low temperature radiators, ...
- > Leaving water temperature range from 5°C to 45°C without electric heater
- > Super wide operating range for cold/hot water production from -20 to +43°C ambient outdoor temperature
- > Saves time on system design as all water-side components are fully integrated with direct control over leaving water temperature
- > Saves space with contemporary wall hung design
- > Requires no gas connection or oil tank



HXY-A (Low temperature hydrobox)


# HXY-A

Indoor unit				HXY080A	HXY125A
Cooling capacity	Nom.	kW		8	12.5
Heating capacity	Nom.	kW		9	14
Casing	Colour	White			
	Material	Precoated sheet metal			
Dimensions	Unit	H x W x D	mm	890x480x344	
Weight	Unit	kg		44	
Sound pressure level	Nom.	dBA		-	
Operation range	Heating	Ambient	Min.~Max. °C	-20~24	
		Water side	Min.~Max. °C	25~45	
Refrigerant	Type	R-410A			
Refrigerant circuit	Gas side diameter	mm		15.9	
	Liquid side diameter	mm		9.5	
Water circuit	Piping connections diameter	inch			
Power supply	Phase/Frequency/Voltage	Hz/V			
Recommended fuses		A		6~16	

## Options & accessories

	HXY080-125A
Drain pan	EKHBDPCA2
Digital I/O PCB	EKRP1HBAA
Demand PCB - Required to connect room thermostat	EKRP1AHTA
Remote user interface (remocon) - Same controller as supplied with cascade unit can be mounted parallel or on other location. If 2 controllers are installed, the installer needs to select 1 master & 1 slave	EKRUAHTB
Back-up heater	EKBUHAA6(W1/V3)
Wired room thermostat - Requires demand PCB EKRP1AHTA	EKRTWA
Wireless room thermostat - Requires demand PCB EKRP1AHTA	EKRTR1
Remote sensor for room thermostat - Requires demand PCB EKRP1AHTA	EKRTETS
Domestic hot water tank - standard (stacked on top of hydrobox)	-
Domestic hot water tank - with possibility for solar connection	-
Solar collector *1	-
Pump station	-

\*1 pump station is necessary for this option

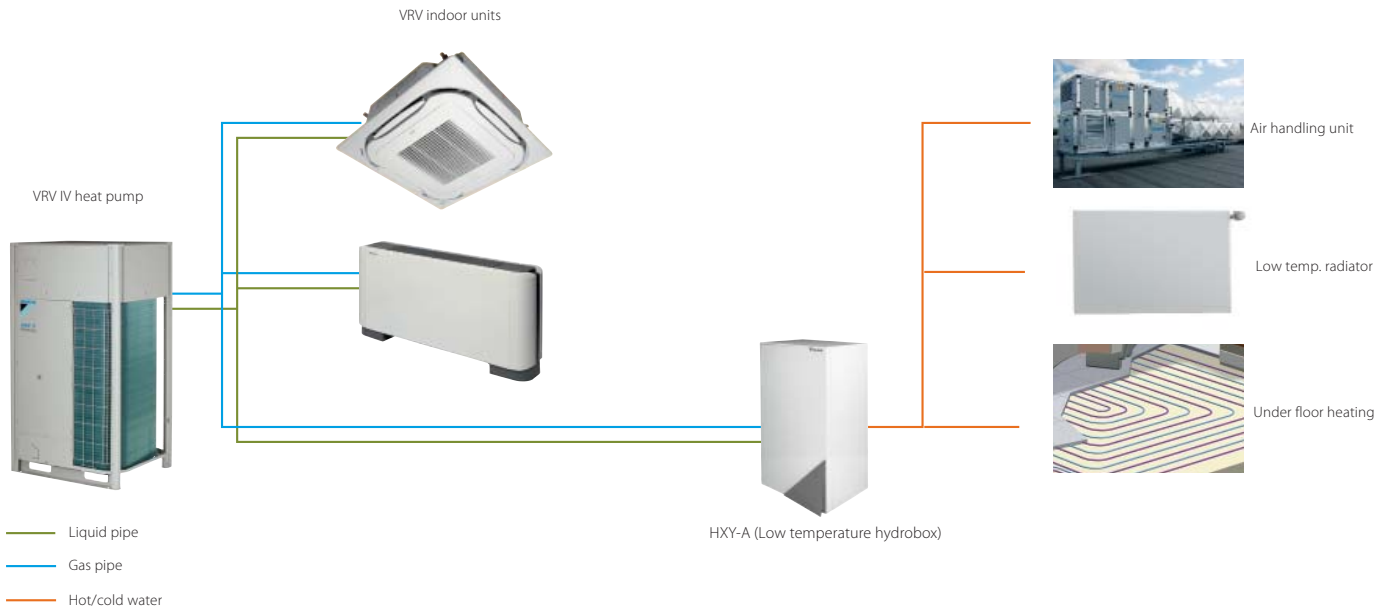

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin UK.

